ASSEMBLY INSTRUCTIONS

MODEL#:RL4268

OTE: Only the technical personnel can be allowto fix and maintain.

IMPORTANT!

Make sure that the power is switch off at the electricity mains supply before commencing work.

IXING INSTRUCTIONS

. Wiredrawing lampshade (18) will be fixed on the Main body pipe(17) above, it fixed ornhood (16), and screw on the crystal rings (7).
. Take out screw (4) and rotate it into crystal lifting ring (7) (at least 6mm) and hen tightened with washer (6) &hexagonal nut(5).
. Rotate the one nut of screw(4) till close to the first nut and then rotate screw 4)into batten(13). Make sure screw (4) should go through batten(13).
. Use outlet box screws (14) to fix batten (13) on outlet box (1).
. Take out ring cover(9) from crystal lifting ring (7) and then let the canopy (8) hrough crystal lifting ring (7). Adjust the crystal lifting ring to a certain eight.
. Tighten the nut to fix on batten (13) in the right position.
. Ground Connection (See picture 1): there are one tapping hole & two dimples. ind the supply ground wire (2) on the green ground screw (15) and then put it into apping hole. Connect the fixture ground wire (3) with supply ground wire (2) by onnecting terminal (12). Caution: DO NOT connect ground wire with supply power ire.
. Connect fixture supply wire (10) with power supply wire (11). Caution: Remember o distinguish the positive and negative charges. (See picture 2)
. Push canopy (8) up to the ceiling.
0. Attach ring cover (9) on crystal lifting ring and fix canopy (8) as well.
1. Put shade (18) on holder and tightened with out ring
2. Screw bulb in the holder.

REPLACEMENT BULB

o not exceed the maximum wattage.
ight bulbs recommended: RL4268 -E12 -4 x 40W Max, Type B.

CLEANING CARE

lean with a soft dry cloth.

SAFETY INFORMATION

. Lamp used must in rated voltage, and do not touch the bulb with bare hands . lways switch off the electricity supply and allow to cool for 10 minutes before hanging the light bulbs.

. If the external cables have been demaged, Pls change or repair by manufacturer or ervice agency or professional electrician, In order to avoid the danger.

A

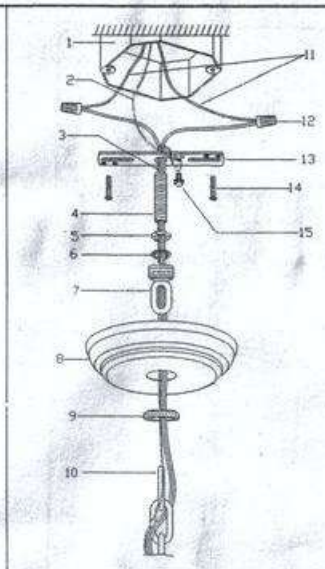

B